

PLATINUM SMART-HEAT™ ELECTRIC

Available in black and white, our Platinum Smart-Heat™ Electric heater is specifically suited for low-clearance and design-focused spaces. This slim-line, stainless steel unit spreads comfort evenly in its space, all while minimising light emission and blending seamlessly into the background with our recess mounting solutions.



2300W & 3400W SERIES
BLACK | WHITE



2300W & 3400W SERIES
BLACK | WHITE

SPECIFICATIONS

Reference the specification guide below to help you select the correct solution for your needs.

MODEL NUMBER	2300W SERIES	3400W SERIES
PRODUCT CODES PLATINUM ELECTRIC	BH0320004 BH0320009	BH0320006 BH0320010
PRODUCT CODES PLATINUM ELECTRIC MARINE	BH0320011 BH0320013	BH0320012 BH0320014
FUEL TYPE	ELECTRIC	ELECTRIC
COLOUR	BLACK WHITE	BLACK WHITE
HEAT AREA	6M ²	10M ²
RATED CURRENT	220 - 240V/9.6A	220 - 240V/14.2A
MINIMUM FLOOR CLEARANCE	WALL 1800MM CEILING 2400MM	

MOUNTING OPTIONS

CEILING MOUNT	✓	✓
CEILING RECESS KIT PRODUCT CODES	BH3130017	BH3130027
WALL MOUNT	✓	✓
RECESSED FLUSH MOUNT	✓	✓
CEILING POLE MOUNT	✓	✓
CEILING POLE (600MM) PRODUCT CODE	BH3130023	BH3130023
CEILING POLE (1200MM) PRODUCT CODE	BH3130024	BH3130024
FREESTANDING	-	-

CONTROL OPTIONS

ON OFF	✓	✓
ON OFF PRODUCT CODE	BH3130019-1	BH3130019-1
DIMMER	✓	✓
DIMMER PRODUCT CODE	BH3130020-1	BH3130020-1
MASTER REMOTE *	✓	✓
MASTER REMOTE PRODUCT CODE	BH3130021	BH3130021

* Control up to six zones of heaters with unlimited heaters per zone from a single control. Dimmer controller required. Remote Control operates within 30m of heaters.


Measurements displayed within this document are minimum requirements for installation. Bromic takes no responsibility for incorrect or non-compliant installations. All measurement in this document are displayed in mm.

DIMENSIONS


With a wide range of sizes available, find the ideal heater to suit your outdoor space.

PROFILE

2300W




3400W

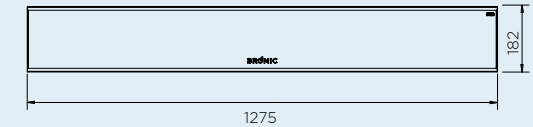


CEILING RECESS


CEILING RECESS FRAME 2300W

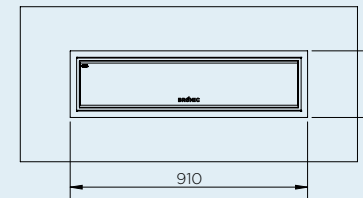

CEILING RECESS FRAME 3400W

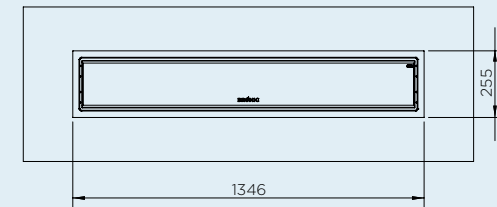


MINIMUM CAVITY SIZE FOR BOTH 2300W & 3400W MODELS

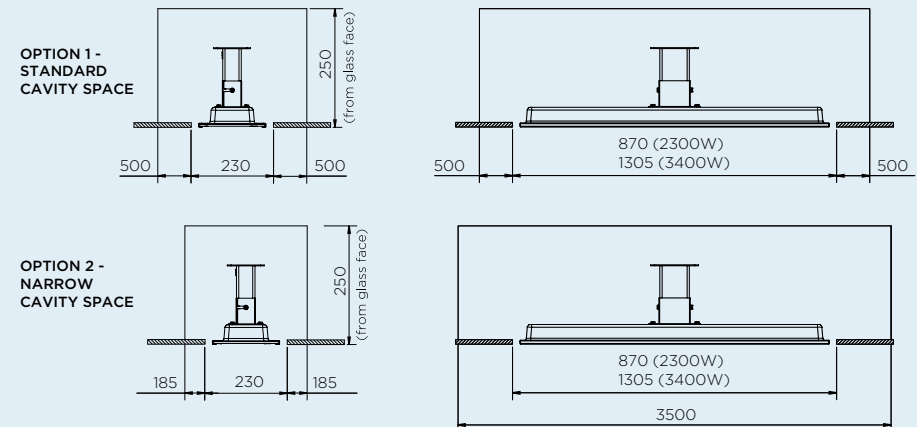


MOUNT OPTIONS

With a wide array of mounting options, Bromic offers solutions to compliment any décor and provide functionality for ambiance and comfort.


CEILING & WALL MOUNT

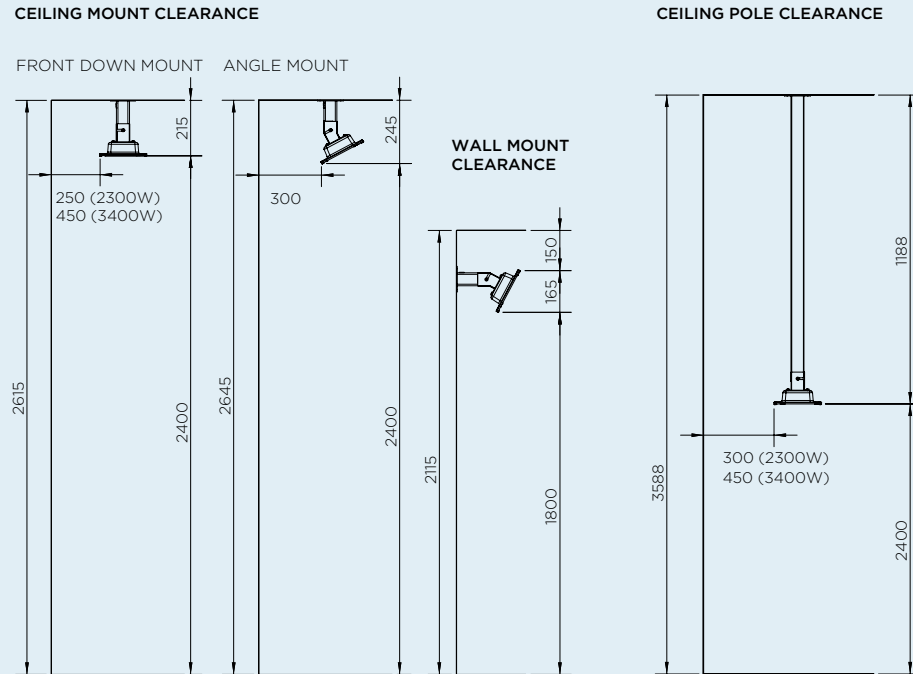

WALL BRACKET (INCLUDED)



CEILING BRACKET (INCLUDED)




HEATING REACH

Creating ideal comfort levels, Bromic heaters offer a variety of heat distribution options to suit your outdoor heating needs.

HEAT AREAS

2300W SERIES
HEATING APPROXIMATELY 6M²
2300W HEATING POWER

3400W SERIES
HEATING APPROXIMATELY 10M²
3400W HEATING POWER

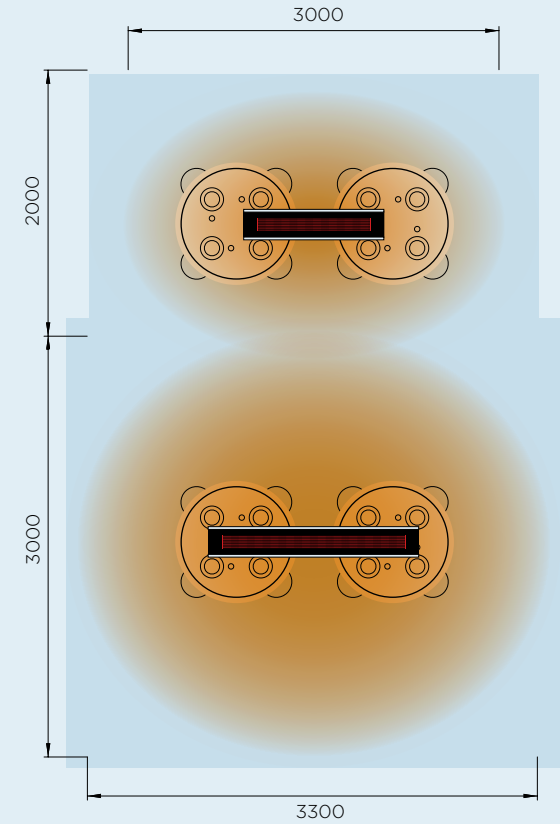

CONTROL OPTIONS




ON | OFF CONTROL



DIMMER CONTROL



MASTER REMOTE



REDEFINE THE BOUNDARIES
OF YOUR SPACE, BY INCLUDING
THE OUTDOORS. CONTROL THE
CLIMATE IN YOUR NEXT PROJECT
WITH BROMIC SMART-HEAT™.



**VERSATILE
MOUNTING SOLUTION**
Minimal vertical clearance

HIGH PERFORMANCE CONSTRUCTION
304 stainless steel & tinted ceramic screen

**CLEAN, COMPACT AND
ELEGANT DESIGN**
For seamless integration



**COMPATIBLE WITH
SMART-WIRELESS
TECHNOLOGY**

**ADJUSTABLE MOUNTING
BRACKETS**
Allows for directional
heat distribution

BROMIC.COM

ASIA PACIFIC | NORTH AMERICA | EUROPE

Bromic pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.